




POWER & EFFICIENCY	6.10m	7.32m
INPUT POWER OPTIONS	AC 1PH 200-240V 50/60Hz AC 3PH 200-240V 50/60Hz AC 3PH 380-480V 50/60Hz	
RATED CURRENT (Amp)	6.5 A 3.5 A 3.0 A	6.5 A 3.5 A 3.0 A
MAXIMUM SPEED (RPM)	71 RPM	51 RPM
AFFECTED AREA	32 m Dia 1,022 m²	35.1 m Dia 1,208 m²

DIMENSIONS & WEIGHT	6.10m	7.32m
FAN DIAMETER	6.10m	7.32m
FAN WEIGHT	141 lbs (64 kg)	150 lbs (68 kg)

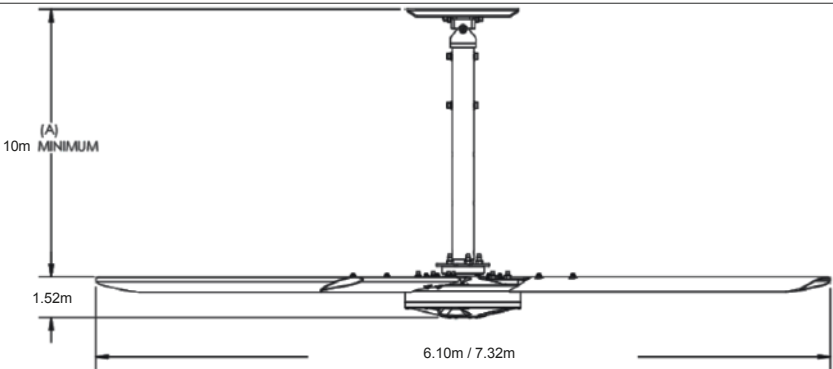

MOUNTING & SAFETY	
MOUNTING OPTIONS	I-beam Glulam
DOWNROD (A)	Downrods available in 3 adjustable increments: 0.76-1.22 m, 1.37-1.83 m, 1.98-3.05 m Downrod length must be specified at time of order.
SAFETY FEATURES	Fan Retention System Airfoil Retention System Fire Relay

IN THE BOX	
INCLUDED	Fan I-beam mount with pre-wired downrod Control panel Install manual Mounting hardware kit Communication Kit Guy wire kit
OPTIONAL	Additional cable lengths Glulam brackets Fire Relay

WARRANTY & CERTIFICATIONS	
CERTIFICATIONS	ETL/Intertek-certified to ANSI/UL 507 and CSA C22.2 No. 113 in North America
WARRANTY ¹	Limited 5-Year Warranty

¹See complete warranty for details.

180 Threet Industrial Rd, Suite 120 | Smyrna, TN 37167 | 1-844-591-FANS (3267) | INDUSTRIALFANS.HUNTERFAN.COM